


|                                                                                   |                              |                             |                         |
|-----------------------------------------------------------------------------------|------------------------------|-----------------------------|-------------------------|
|  | <b>AGAS Lubes WLL</b>        | Document ID:                | <b>AL-IMS-PROD-SN25</b> |
|                                                                                   | <b>Product Specification</b> | Version:                    | <b>03</b>               |
|                                                                                   |                              | Date of last tested:        | <b>15/01/2026</b>       |
|                                                                                   |                              | Page:                       | <b>1 of 1</b>           |
|                                                                                   |                              | Information classification: | <b>Public</b>           |

**Product Name: SN25**

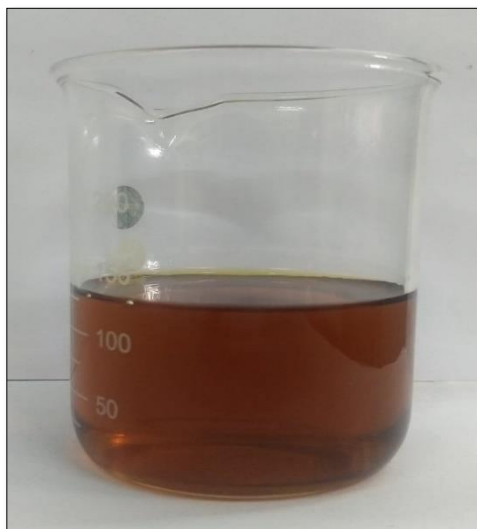

| Sr. No. | Parameters                       | Test Method     | Unit     | SN-25            |
|---------|----------------------------------|-----------------|----------|------------------|
| 1       | Appearance                       | Visual          | -        | Clear and Bright |
| 2       | ASTM Colour                      | ASTM -D 1500    | -        | 3.0 - 5.5        |
| 3       | Density at 15 deg C              | ASTM -D 1298    | gm/mL    | 0.84 - 0.86      |
| 4       | Kinematic Viscosity at 40 deg C  | ASTM -D 445     | cSt      | 6.0 - 12         |
| 5       | Kinematic Viscosity at 100 deg C | ASTM -D 445     | cSt      | 2.0 – 3.0        |
| 6       | Viscosity Index, Min             | ASTM -D 2270    | -        | 99               |
| 7       | Flash point, Min                 | ASTM -D 92      | Deg. C   | >95              |
| 8       | Total Acid Number, mg KOH/g      | ASTM -D 664     | mgKOH/gm | < 0.05           |
| 9       | Crackle Test/Moisture            | Standard Method | -        | Negative         |
| 10      | Pour Point, max                  | ASTM -D 97      | Deg. C   | -6               |
| 11      | Copper Strip Corrosion, max      | ASTM -D 130     | -        | 1                |
| 12      | Conradson Carbon Residue         | ASTM -D 189     | %w/w     | <0.4             |
| 13      | Ash Content                      | ASTM -D 482     | %w/w     | 0.04             |
| 14      | Sulphur Content                  | ASTM -D 4927    | %w/w     | <0.5             |